


## FLOOR PLAN FOR PROPOSED IMPROVEMENT OF FORMER OTP CENTER TO STAFF RESIDENTIAL HOUSES

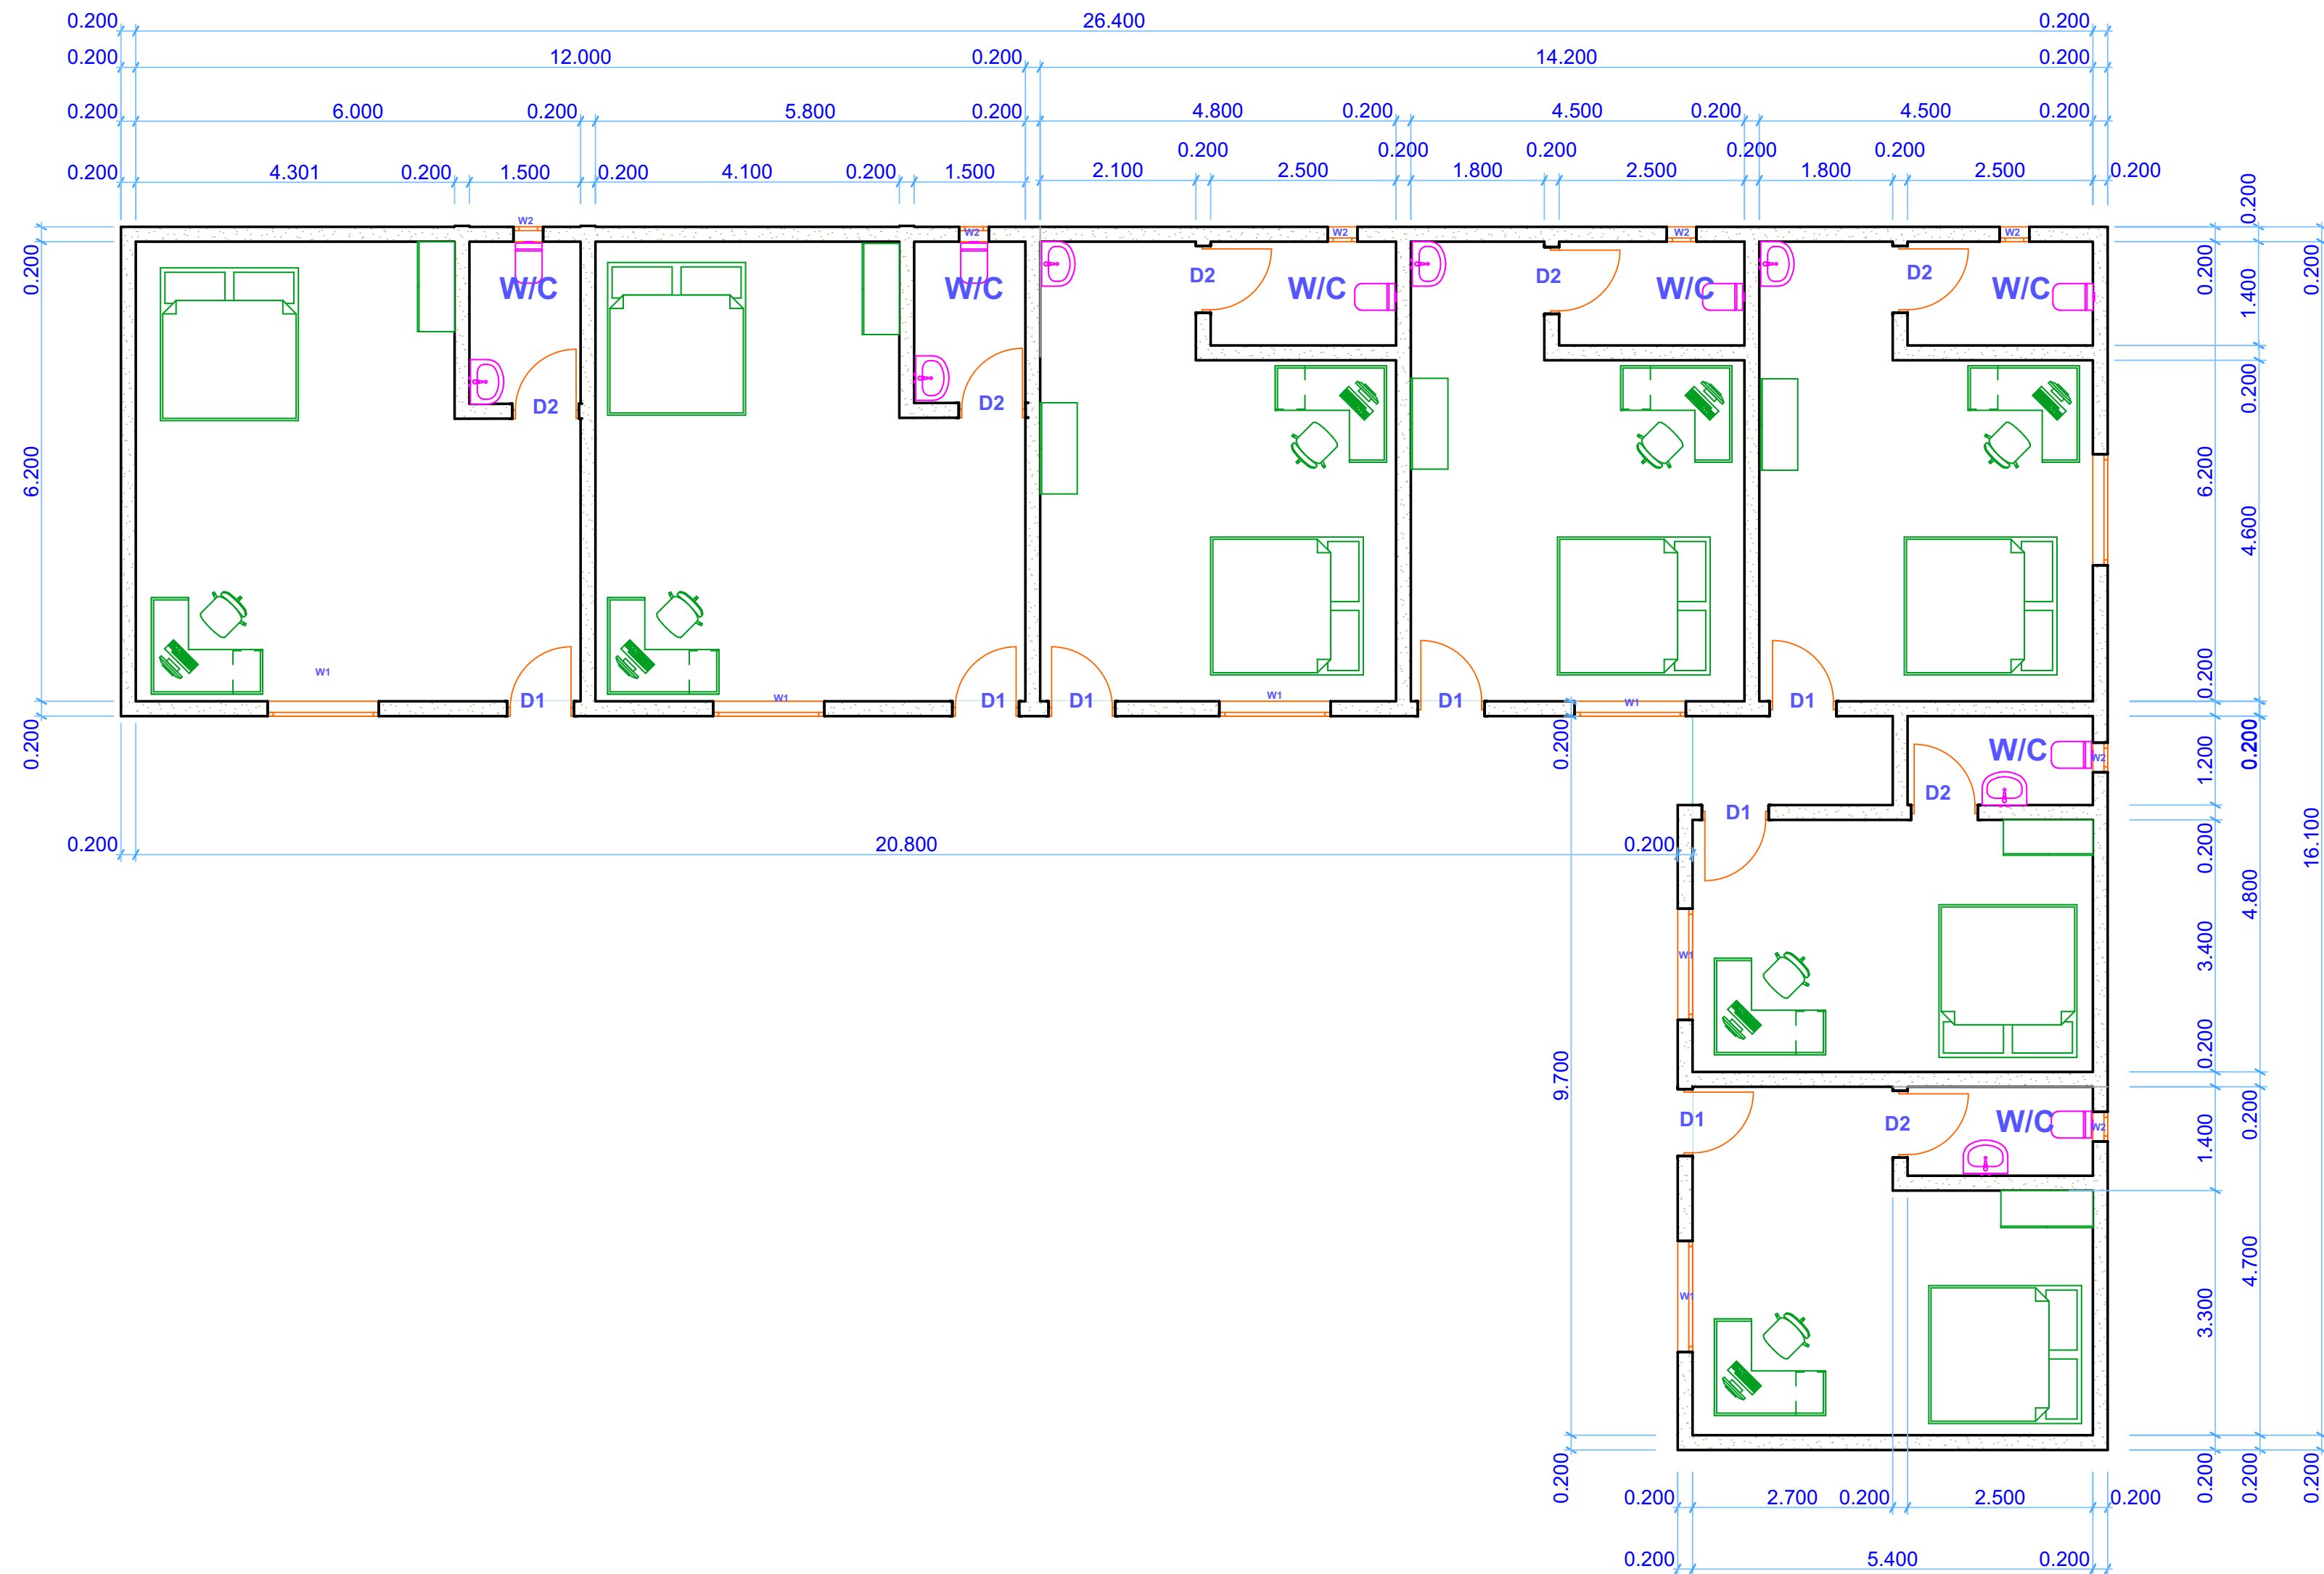

## TITLE BLOCK

## NOTES

all dimensions are in mm  
walls are made of 200mm  
masonry blocks  
windows  
W1-1500X1500  
W2-1500X1500

## DOORS

D1=1200X2100 single leaf  
grill door  
D2=900X2100 Single leaf  
mahogany semi-solid door

all wardrobes are 600x2000  
inbuilt with a 100mm raised  
slab platform

columns  
all columns are 200mm diameter  
circular reinforces with 4D12 bars  
and D8 @200c/c

column bases are 600mmx600mm  
reinforces with D12 @200c/c

all beams are 150mmx200mm size  
reinforced with 4 D 12 and D8  
rings @2000c/c

DRAWN BY	RUTH TOPISIA
----------	--------------

CHECKED BY	RUTH TOPISIA
------------	--------------

DATE	JUNE,2025
------	-----------

SCALE	1:100
-------	-------

CLIENT:	IRC
---------	-----